

Technical Data Sheet U Series

Basic Info

KSF U 66x730-71	KSF U 66x550-71
Nominal length (mm)	
730	550
Tube diameter (mm)	
66	66
Weight (kg)	
2.60	2.20
Item number	
21063	21060

Construction

- Coating: Hot-dip galvanized according to DIN EN ISO 1461
- Continuous welded helix
- Patented conical body forged from a single piece of tubing

Applications



Accessories



Screwing Bar short
0.60 kg
Item No. 20070




KSF U 66x
730-71

Technical Data

	KSF U 66x730-71	KSF U 66x550-71
a	Length (mm)	
	730	550
b	Shaft outer diameter (mm)	
	66	66
c	Square hole spacing (mm)	
	42	42
d	Middle square hole spacing (mm)	
	90	90
e	Square hole spacing (mm)	
	50	50
f	Square hole diameter* (mm)	
	11	11
g	Gauge (mm)	
	71	71
h	U profile width (mm)	
	70	70
i	U profile depth (mm)	
	130	130

* To fit M10 carriage bolts

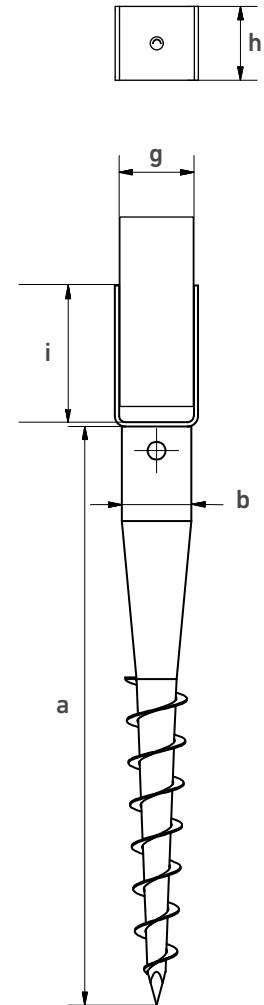


Online Service

KSF U 66x730-71	KSF U 66x550-71
-----------------	-----------------

Webkey

U2106311D

U2106011D



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
 Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com